

Product data sheet


Plus

AR7383



ARRONE overhead concealed door closing device:

- Power size: 2 to 4 adjustable by spring tension
- Function: Closing, latching, cushion stop
- Cover: no cover
- Maximum door width: 1,100 mm
- Maximum door weight: 80 kg
- Arm application: door mount concealed, transom mount concealed
- Successfully type tested for conformity to all the requirements of **BS EN 1154:1997**
 - Door mount pull side, transom mount pull side: 3 | 8 | 4/2 | 1* | 1 | 3
- Included in a successful fire test to **BS EN 1634** Part 1. Assessed for use on 30, 60, 90 and 120 minute timber fire doors.
- CE Marked: AD5071
- Certifire approved: CF5181; DOP: HUK0026
- The AR7383 series door closing device has been successfully fire tested with the use of an intumescent kit (AR/INT-7383). The supply and fitting of this intumescent kit is essential to the products compliance with the fire test evidence it has gained. HOPPE take no responsibility for any product purchased and fitted to fire resistant door sets without intumescent protection as tested with the product.

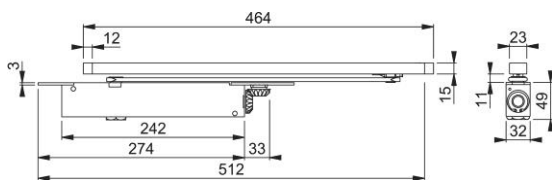

| | |
|---|--|
| Article number | 50002485 |
| Product ref. | AR7383-KIT-SNP |
| EAN-Code | 5051358078154 |
| Country of origin | Taiwan |
| CN-Code | 83026000 |
| Type | mechanism and slide track |
| Door type | wooden door/metal door |
| Maximum door width | 1100 mm |
| Maximum door weight | 80 kg |
| Arm Application | figure 1 and 61 |
| Mechanism function | Spring adjustable, closing/latching speed |
| Mechanism type | cam action |
| Fixings | Timber door and metal door |
| Shape | |
| Power size | 2 to 4 |
| Opening Angle | max. 105° opening |
| Mechanism dimensions and fixing centres | 276x32x45 mm; centres 320x20 mm; Track 424 |
| Arm type | Concealed slide arm |
| Fire safety assessories | Intumescent Kit |
| Finish | satin nickel plate |
| Arm finish | satin nickel plated |
| Range | ARRONE Range |
| Packing unit | 1 |
| Outer carton | 9 |